

ARK-11

Intel Celeron N3350 DC SoC with 4K Dual HDMI/Dual LAN/M.2 DIN-Rail Fanless Box PC



Features

- Intel Celeron N3350 Dual Core 1.1 GHz
- DIN-Rail system with essential I/O ports on front-side bezel
- I-Grade 4G DDR3L memory and 64G SSD built-in
- Windows 10 IoT Enterprise built-in
- 60W adaptor bundled in the accessory box
- Dual HDMI display up to 4K resolution
- 1 x full-size mPCIe with SIM holder and 1 x M.2 2230 for WIFI #1
- 12V ~ 28V wide range power input
- 30 ~ 70 °C extended operating temperature
- Advantech WISE-DeviceOn support



WISE-DeviceOn SUSI API



Specifications

Model Name	ARK-11-S1A3	
Processor System	CPU	Intel Celeron N3350 Dual Core SoC
	Frequency	1.1 GHz, turbo burst up to 2.4 GHz
	Core Number	2
	BIOS	AMI EFI 64 Mbit
Memory	Technology	DDR3L 1866 Mhz
	Max capacity	8GB, 1 x 4GB memory (-40 ~ 85 °C) built-in
	Socket	2 x 204-pin SO-DIMM
Graphics	Chipset	Intel HD Graphics 500, CPU integrated
	Graphic Engine	Gen9 Low Power; 18 Execution Units Media Codec Supported: H.264, MPEG2, MVC, VC-1, WMV9, H.265 / HEVC, VP8, JPEG / MJPEG 3D HW Acceleration: OpenGL 4.4, DirectX* 12, OpenCL* 2.0
	HDMI	HDMI1 : 3840 x 2160 @ 30Hz HDMI2 : 3840 x 2160 @ 30Hz
	Dual Display	HDMI1 + HDMI2
Ethernet	LAN1	10/100/1000 Mbps Intel i210GbE, support Wake On LAN
	LAN2	10/100/1000 Mbps Intel i210GbE, support Wake On LAN
Audio	Interface	Realtek ALC888S, High Definition Audio, Mic-in, Line-out
I/O Interface	Serial Ports	2 x RS-232/422/485 with auto flow control, COM2 with 5V/12V power supply
	USB Ports	4 x USB 3.0
	GPIO	8-bit Programmable DIO (Optional)
Expansion	Mini PCIe	1 x Full-size mPCIe with SIM holder #1
	M.2	1 x M.2 2230 E key for WIFI module #1
Storage	SSD/HDD	1 x 2.5" 64G MLC SSD (-40~85°C) built-in
	mSATA	1 x Full-size mSATA (*share with mPCIe slot)
Other	WatchDog Timer	255 levels timer interval, setup by software
Software Support	Microsoft Windows	Windows 10 IoT Enterprise built-in
	Linux	Support by project
Power Requirement	Power Type	ATX/AT
	Power Input Voltage	12 ~ 28 V _{DC}
	Power Adaptor	AC to DC, 24V/2.5A 60W adaptor built-in
Power Consumption	Typical	6.4W
	Max.	18.1W
Mechanical	Construction	Aluminum housing
	Mounting	DIN-rail/Wall Mount
	Dimensions (W x H x D)	53.5 x 158 x 114 mm (2.11" x 6.22" x 4.49")
	Weight	1.2 kg (2.65lb)
Environment	Operating Temperature	With extended temp. peripherals: -30 ~ 70 °C (-22 ~ 158 °F) with 0.7 m/s air flow With 2.5 inch hard disk: 0 ~ 40 °C (32 ~ 104 °F) with 0.7 m/s air flow
	Storage Temperature	-40 ~ 85 °C (-40 ~ 185 °F)
	Relative Humidity	95% @ 40 °C (non-condensing)
	Vibration during Operation	With SSD: 3 Grms, IEC60068-2-64, random, 5~500 Hz, 1hr/axis
	Shock during Operation	With SSD: 30 G, IEC-60068-2-27, half sine, 11 ms duration
	EMC	CE/FCC Class B, CCC, BSMI
	Safety	UL, CB, CCC and BSMI

#1 SIM holder and M.2 slot are hardware interfaces for wireless communication integration only. System level RF certification is not available.

ADVANTECH


Fanless Embedded Box PCs

All product specifications are subject to change without notice.


Last updated: 22-Jan-2021

Dimensions


Unit: mm

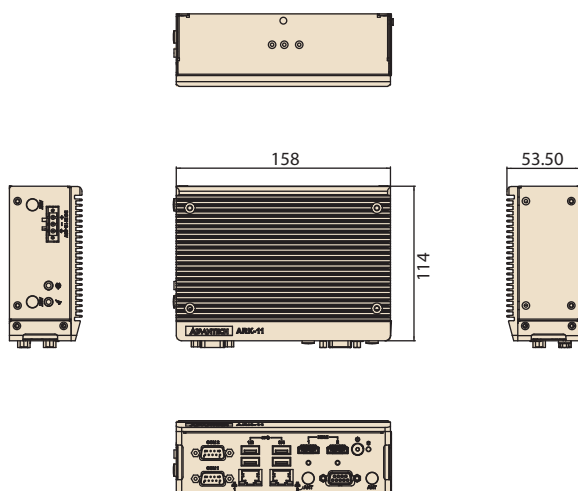


Wall Mount




DIN Rail



Front Panel External I/O Mechanical Layout/Drawing



Top Panel External I/O Mechanical Layout/Drawing



Ordering Information

Part No.	CPU	RAM	HDMI	GbE	USB 3.0	RS-232/422/485	Audio	Full-size MiniPCle	SIM	M.2	2.5" SATA III HDD Bay	mSATA	Power Input	Operating Temp.
ARK-11-S1A3	Intel Celeron N3350 1.1 GHz SoC	4GB built-in	2	2	4	2	Mic-in, Line-out	1	1	1	64GB SSD built-in	1 (shared w/ mPCle)	12-28 V _{oc}	-30 ~ 70 °C

Packing List

Part Number	Description
-	1 x ARK-1220L Unit
-	1 x User Manual (Simplified Chinese)
-	Wrench for top cover
1960015198T011	1 x DIN-rail bracket
1652004519	1 x 3-pin terminal block
96PSA-A60W24T2-3	24V/2.5A 60W adaptor

Optional Items

Part Number	Description
1702002600	Power cable 3-pin 183cm, USA type
1702002605	Power cable 3-pin 183cm, EU type
1702031801	Power cable 3-pin 183cm, UK type
1700000237	Power cable 3-pin 183cm, PSE type
1700023855-01	1M lockable HDMI cable
1700023856-01	3M lockable HDMI cable
1700019967	GPIO cable, F Cable 2*5P-2.0/D-SUB 9P(F) 15CM
AMK-W003	ARK-1220L wall mount kit

Embedded OS

Part Number	Description
20706WX9ES0108	Win10 IoT Ent 2019 LTSC 64bit, English (14.7GB)

Online Download www.advantech.com/products

TEMPEL GROUP ARGENTINA

www.tempelgroupplatam.com

baires@tempelgroup.com

Tel: +54 11 4897-7184/7178

TEMPEL GROUP en el mundo

BUENO AIRES • MADRID • VALENCIA • BILBAO • SEVILLA • LISBOA • PORTO • LIMA • SÃO PAULO • SANTIAGO DE CHILE • BOGOTÁ • CIUDAD DE MÉXICO • CIUDAD DE PANAMÁ • MONTEVIDEO • QUITO



tempel
group