

IGS-1042GPA



IGS-1042GPA

➤ **Industrial 6-port slim type unmanaged Gigabit Ethernet switch with 4x10/100/1000Base-T(X) and 2x100/1000Base-X, SFP socket**

Features

- IGS-1042GPA provide 4x10/100/1000Base-T(X) ports
- SFP port supports 100Base-FX and 1000Base-X speed
- Supports auto-negotiation and auto-MDI/MDI-X
- Supports store and forward transmission
- Supports flow control
- Rigid IP-30 housing design
- DIN-Rail and wall mounting enabled




Introduction


IGS-1042GPA is an unmanaged Ethernet switch, has 4x10/100/1000Base-T(X) ports and 2x100/1000Base-X SFP port. The SFP port optical network speed can be set by changing the settings of the DIP-Switch below. The wide operating temperature range from -40 to 70°C can satisfy most of operating environment. Therefore, the switch is one of the most reliable choices for Ethernet application.

Practical Operation

IGS-1042GPA can be used in connecting several Ethernet devices like IP-Camera or other Ethernet devices. In addition, there are two different power inputs at terminal block to avoid interruption caused by power down. When the primary DC power input fails, the backup power input will take over immediately to guarantee a non-stop operation.

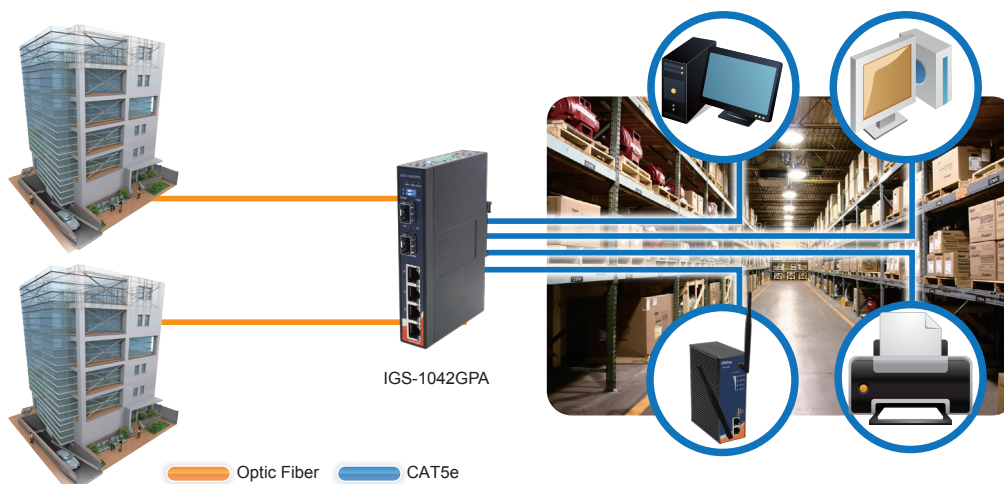

Dimensions

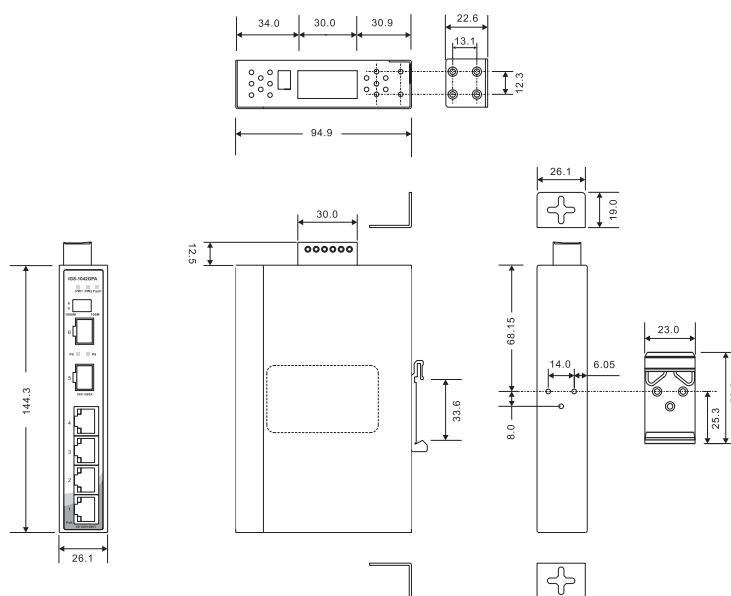

(Unit=mm)

Specifications

ORing Switch Model	IGS-1042GPA
Physical Ports	
10/100/1000Base-T(X) Ports in RJ45 Auto MDI/MDIX	4
100/1000Base-X SFP port	2
Technology	
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3ab for 1000Base-T IEEE 802.3z for 1000Base-X IEEE 802.3x for Flow control
MAC Table	1K MAC addresses
Processing	Store-and-Forward
LED Indicators	
Power Indicator	Green : Power LED x 2
Fault Indicator	Amber : Indicates PWR1 or PWR2 failure occurred
10/100/1000Base-T(X) RJ45 Port Indicator	Green for port Link / Act Amber for 100Mbps indicator
100/1000Base-X SFP port indicator	Green for port Link/Act
SFP Speed DIP-Switch	
DIP-Switch 1/2	DIP-Switch 1 (ON) and DIP-Switch 2 (ON) : SFP speed setting to 100Mbps DIP-Switch 1 (OFF) and DIP-Switch 2 (OFF) : SFP speed setting to 1000Mbps

Relay Output DIP-Switch	
DIP-Switch 1	Power-1 failed warning : (ON) enable, (OFF) disable.
DIP-Switch 2	Power-2 failed warning : (ON) enable, (OFF) disable
Fault contact	
Relay	Relay output to carry capacity of 1A at 24VDC
Power	
Redundant Input Power	Dual DC inputs. 12~48VDC on 6-pin terminal block.
Power Consumption (Typ.)	6.4 Watts
Overload Current Protection	Present
Reverse Polarity Protection	Present
Physical Characteristics	
Enclosure	IP-30
Dimensions (W x D x H)	26.1(W) x 94.9(D) x 144.3(H) mm (1.03x3.74x5.68 inch.)
Weight (g)	410g
Environmental	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-40 to 70°C (-40 to 158°F)
Operating Humidity	5% to 95% Non-condensing
Regulatory Approvals	
EMI	FCC Part 15, CISPR (EN55022) class A
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11
Shock	IEC60068-2-27
Free Fall	IEC60068-2-32
Vibration	IEC60068-2-6
Safety	EN60950-1
Warranty	5 years

Ordering Information

IGS-1 **AA** **B** **CC** **A**

Code Definition	10/100/1000Base-T(X) Port Number	Additional Port Number	Additional Port Type
Option	- 04: 4 ports	- 2: 2 ports	-GP: 100/1000Base-X in SFP

Available Model	Model Name	Description
	IGS-1042GPA	Industrial 6-port slim type unmanaged Gigabit Ethernet switch with 4x10/100/1000Base-T(X) and 2x100/1000Base-X, SFP socket
Packing List <ul style="list-style-type: none"> IGS-1042GPA DIN-Rail Kit Wall-mount Kit Quick Installation Guide 		Optional Accessories (Can be purchased separately) <ul style="list-style-type: none"> SFP100 series : 100Mbps SFP optical transceiver SFP 1G series : 1Gbps SFP optical transceiver DR-45 series, 45W DIN-Rail power supply DR-75 series, 75W DIN-Rail power supply DR-120 series, 120W DIN-Rail power supply

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ORing:

[IGS-1042GPA](#)

TEMPEL GROUP ARGENTINA

www.tempelgroupplatam.com

baires@tempelgroup.com

Tel: +54 11 4897-7184/7178

TEMPEL GROUP en el mundo

BUENO AIRES • MADRID • VALENCIA • BILBAO • SEVILLA •

LISBOA • PORTO • LIMA • SÃO PAULO • SANTIAGO DE CHILE • BOGOTÁ •

CIUDAD DE MÉXICO • CIUDAD DE PANAMÁ • MONTEVIDEO • QUITO

