


KB1265 12V 65Ah



Kaise Battery series are Top terminal VRLA AGM battery for General use. With advanced manufacturing technique and industry scale, KB series delivers high energy density and high reliability performance, highly suited for UPS systems, security and alarm systems, telecommunication, utilities, emergency light systems, CATV and other backup applications.

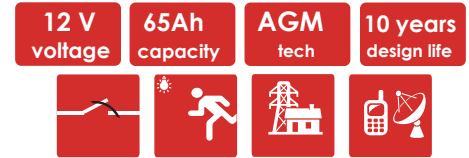

TECHNICAL SPECIFICATIONS


Nominal Voltage (V)	12 (6 cells per unit)
Designed Floating Life (25°C)	10 Years
Nominal Capacity (25°C)	65 Ah @ 10HR-rate (to 1.80Vpc)
Dimension (mm)	L330 x W171 x H170 x TH175
Approx. Weight	20.5kg (45.2 lbs)
Terminal Type	Female Copper Insert M6 (torque:6~8N.m)
Internal Resistance	Approx. 0.0062 Ohm (fully charged @ 20°C)
Max. Charge Current	16A
Max. Discharge Current (5S)	650A
Short Circuit Current	1900 A
Self Discharge	Approx. 3% per month @ 25°C
Ambient Temperature	Discharge: -20~55°C Charge: -20~50°C Storage: -20~45°C
Float Charge Voltage	13.6V/block @25°C (-3mV/ cell/°C)
Equalize and cycle Use Charge Voltage	14.4V/block @25°C
Container Material	ABS (UL94-V0 optional)



Complied standards

- IEC 60896-21/22
- GB/T19638
- JIS C8704
- BS6290 part 4

BATTERY DIMENSIONS

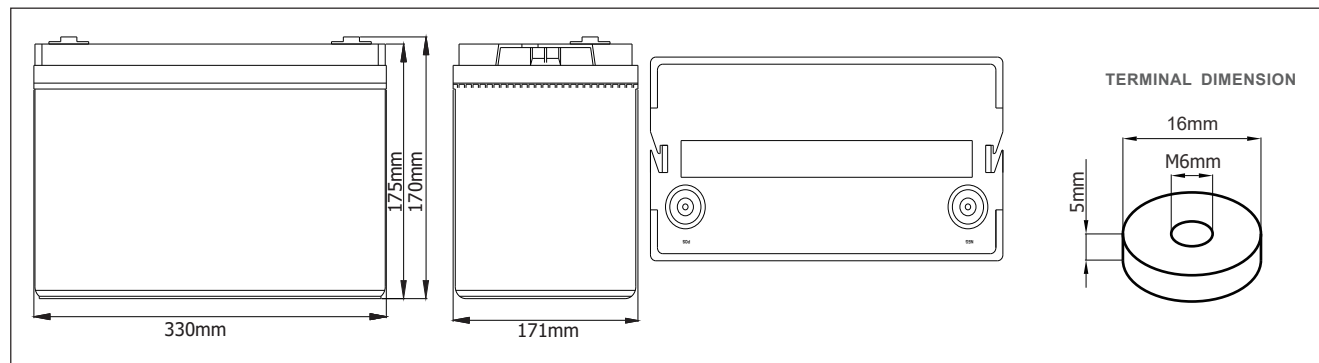


BATTERY DISCHARGE TABLE

Constant Current Discharge Characteristics: Amps (25°C)												
F.V /Time	5 min	10 min	15 min	30 min	1h	2h	3h	4h	5h	8h	10h	20h
1.60 V	193	142	118	72.7	43.5	25.3	18.2	14.5	12.1	8.30	6.82	3.69
1.67 V	172	131	111	69.5	42.3	24.8	18.0	14.4	12.0	8.17	6.76	3.61
1.70 V	154	119	105	66.9	41.4	24.5	17.8	14.2	11.8	8.04	6.63	3.52
1.75 V	134	111	97.2	64.4	40.5	24.1	17.5	14.0	11.7	7.95	6.56	3.46
1.80 V	118	101	90.7	61.5	39.2	23.6	17.2	13.7	11.4	7.79	6.50	3.40
1.85 V	101	91	82.4	58.0	37.5	22.7	16.6	13.3	11.1	7.59	6.27	3.32

Constant Power Discharge Characteristics: W/cell (25°C)												
F.V /Time	5 min	10 min	15 min	30 min	1h	2h	3h	4h	5h	8h	10h	20h
1.60 V	340	256	214	134	81.1	47.4	34.4	27.5	23.0	15.9	13.2	7.14
1.67 V	307	238	204	129	79.2	46.9	34.2	27.3	22.9	15.8	13.1	7.01
1.70 V	277	219	194	125	77.9	46.7	34.0	27.3	22.8	15.7	13.0	6.89
1.75 V	245	206	182	122	77.2	46.2	33.8	27.2	22.8	15.6	12.9	6.82
1.80 V	219	189	172	117	75.3	45.6	33.5	26.8	22.4	15.4	12.8	6.76
1.85 V	190	172	158	112	72.7	44.3	32.6	26.3	22.1	15.1	12.5	6.63

CHARACTERISTICS

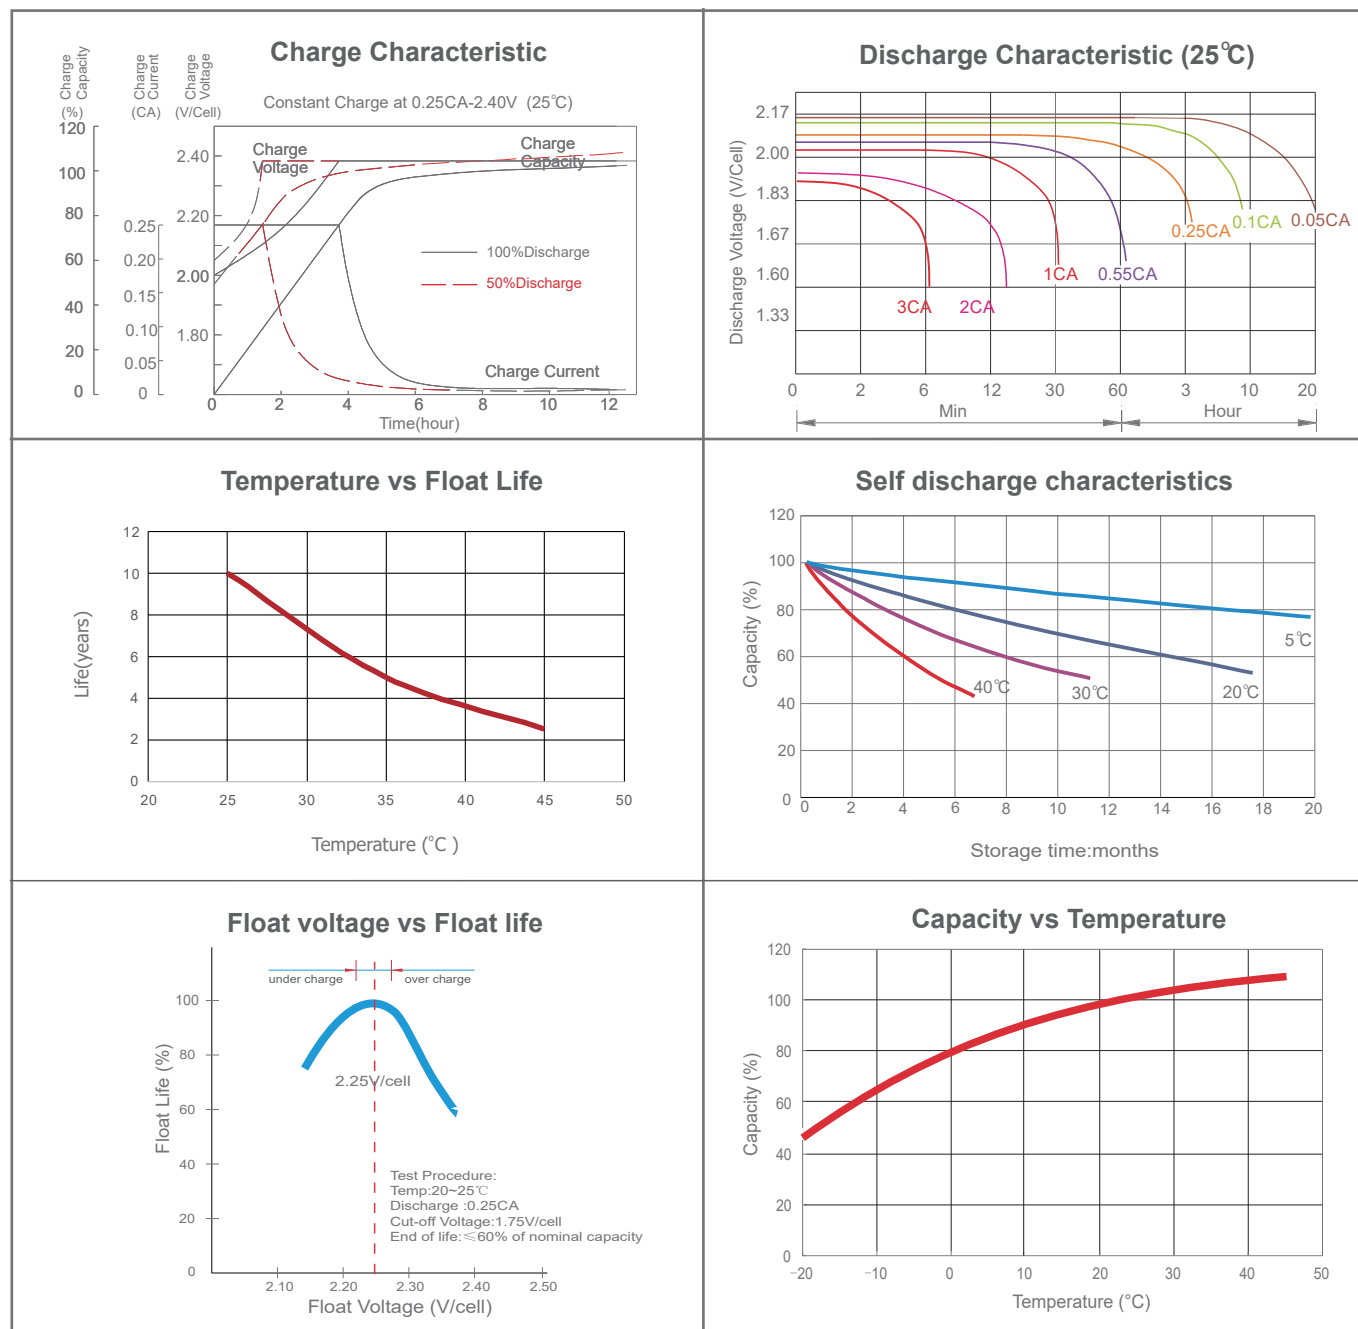

FINAL VOLTAGE SETTINGS RECOMMENDED ACCORDING TO THE DISCHARGE CURRENT

Discharge Current I (A)	$I \leq 0.08C$	$0.08C \leq I < 0.2C$	$0.2C \leq I < 0.6C$	$0.6C \leq I < 1.0C$	$I \geq 1.0C$
Final of Voltage	$\geq 1.85V_{pc}$	$\geq 1.80V_{pc}$	$\geq 1.75V_{pc}$	$\geq 1.70V_{pc}$	$\geq 1.60V_{pc}$

2/2

KB1265-EN 2018 subject to technical modification. E & O. E.

