

OPzS

12OPzS1500

OPzS Series

NARADA OPzS Series Lead Acid batteries are designed with a combination of die-casting Tubular positive framework and superfluous electrolyte technologies to offer a very high level of reliability and a long service life. OPzS batteries used special filter and proof design to ensure no acid fog runs over and burning proof, and also convenient examine and maintenance.


The specification of Narada OPzS series batteries make it idea for a wide range of applications such as Telecommunications, Photovoltaic System, Security System, emergency lighting and UPS.

Features & Benefits

- Low maintenance.
- Super long service life.
- Transparent containers, convenient to observe.
- Special filter installation for acid fog proof.
- High quality and high reliability.
- Special pole sealed technology.
- DIN40736-1 compliant.


Construction

- ComponentRaw material
- PositiveLead dioxide
- NegativeLead
- ContainerSAN
- CoverABS
- TerminalCopper
- SeparatorRubber-PVC
- ElectrolyteSulfuric acid




Terminal Dimensions

Cell Dimensions

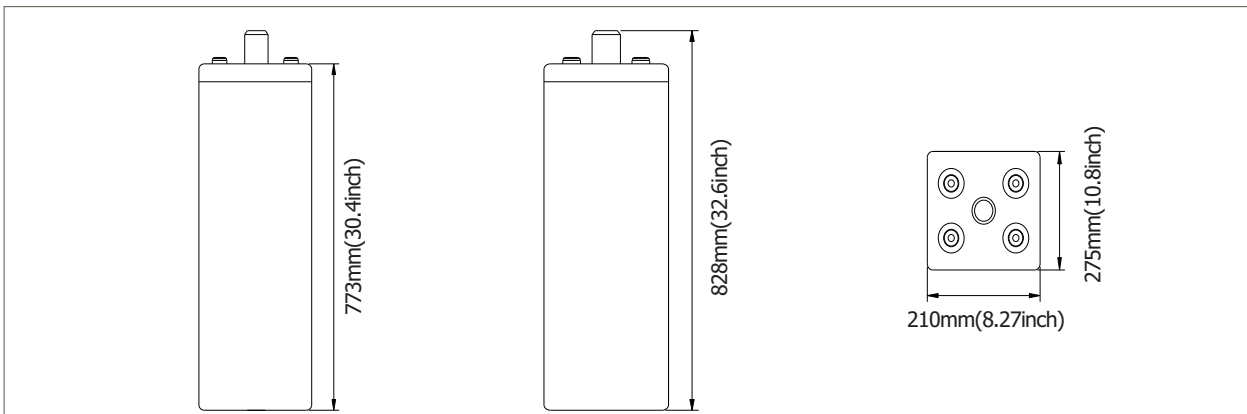

Battery Model	12OPzS1500			
Designed Floating Life	20 Years			
Capacity(25°C)	24HR(67.2A,1.80V)	10HR(150A,1.80V)	5HR(250A,1.80V)	1HR(795A,1.75V)
	1613AH	1500AH	1250AH	795AH
Dimensions	Length	Width	Height	Total Height
	275mm(10.8inch)	210mm(8.27inch)	773mm(30.4inch)	828mm(32.6inch)
Approx. Weight	without electrolyte: 81.7Kg (180 lbs)		with electrolyte: 112Kg(247lbs)	
Internal Resistance	Full charged at 20°C: 0.00028 Ohm			
Self Discharge	3% of capacity declined per month at (20°C)			
Capacity Affected by Temp.(10HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage(25°C)	Cycle use		Float use	
	2.35-2.40V/cell(-5mV/cell/°C), max. Current: 375A		2.23V/cell(-3.0mV/cell/°C)	

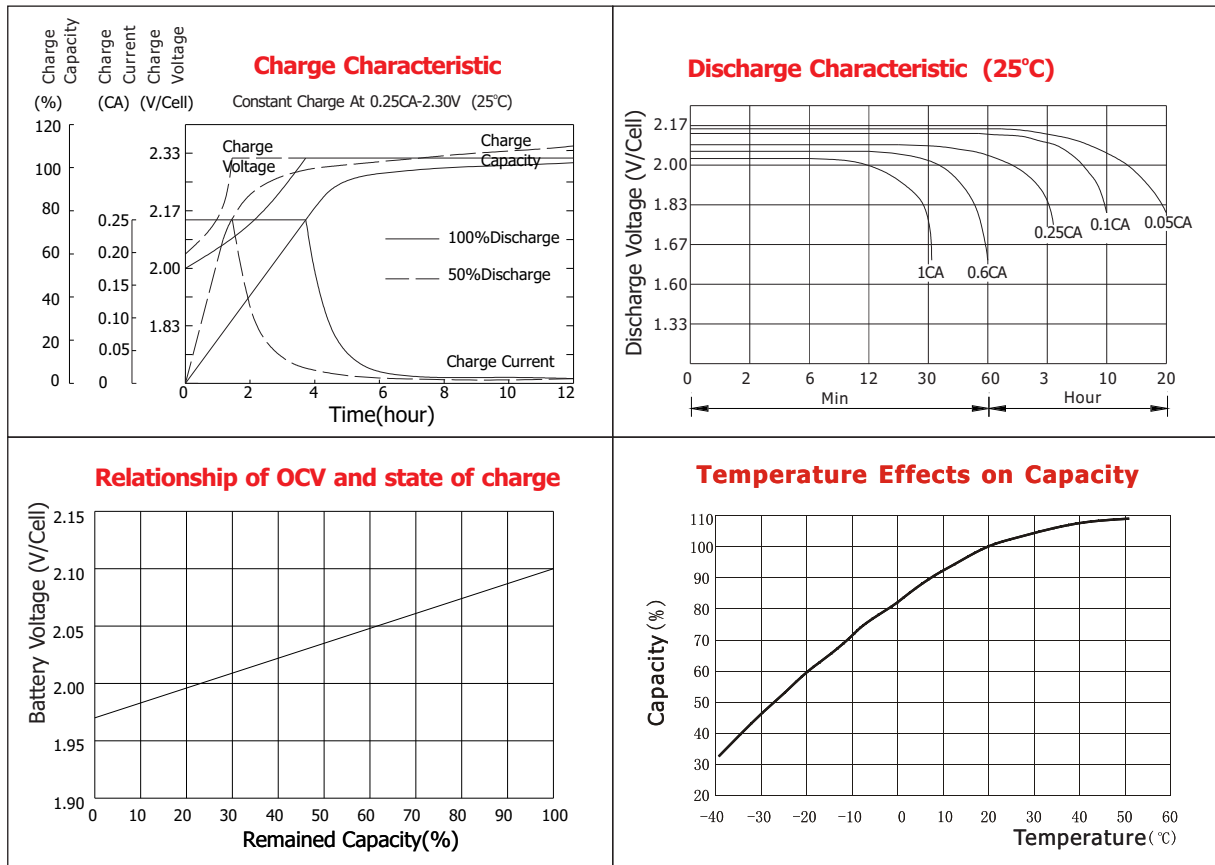

Constant Current Discharge Data Units: Amperes (25°C, 77°F)

End voltage	minutes	hours										
	30	1	2	3	4	5	6	8	10	24	48	
1.60V	1262.4	864.9	538.9	388.7	310.4	266.9	236.0	191.1	158.9	70.9	39.1	
1.65V	1220.7	843.6	528.1	383.0	306.5	264.0	233.0	189.6	158.0	70.9	38.9	
1.70V	1170.3	818.3	515.4	376.2	301.6	260.4	229.3	187.5	157.4	70.1	38.5	
1.75V	1126.7	795.1	501.8	368.3	296.7	255.9	224.8	183.8	155.1	68.7	38.0	
1.80V	1030.7	756.3	483.3	359.5	290.8	250.1	219.0	179.5	150.3	67.2	37.4	
1.85V	866.8	704.0	458.0	348.9	282.0	242.1	211.7	174.4	148.4	65.0	35.6	
1.95V	739.8	562.4	398.5	311.8	262.4	225.2	195.5	158.0	133.4	59.7	33.3	

Constant Power Discharge Data Units: Watts per cell (25°C, 77°F)

End voltage	minutes	hours										
	30	1	2	3	4	5	6	8	10	12	24	
1.60V	3066.9	2348.3	1295.1	984.8	786.9	663.8	583.8	481.8	406.6	339.5	178.8	
1.65V	2904.1	2183.0	1286.7	977.5	780.9	659.4	579.7	478.3	403.8	337.2	177.5	
1.70V	2772.2	2045.4	1268.8	964.5	770.1	650.2	571.8	471.8	398.2	332.5	175.1	
1.75V	2660.5	1924.2	1233.0	940.5	740.1	627.2	559.2	464.1	390.8	326.3	172.6	
1.80V	2553.7	1816.1	1188.9	914.3	722.2	598.5	533.8	442.3	370.8	309.6	169.8	
1.85V	2453.9	1689.0	1144.7	868.9	686.2	582.3	513.1	430.6	355.5	296.8	165.3	
1.95V	2239.0	1503.7	1038.4	840.3	722.2	603.3	489.0	408.8	322.4	269.2	157.4	

NARADA POWER SOURCE CO.,LTD.
No.459 Wensan Road, Hangzhou, Zhejiang, P.R.China
Tel:+86-571-28827013 Fax:+86-571-85126942
Website:www.naradabattery.com E-mail:intl@narada.biz

NARADA ASIA PACIFIC PTE.LTD.
65 Ubi Crescent #07-05 HOLA centre, Singapore
Tel: +65-6848 1191 Fax: +65-6749 3498
E-mail: sales@narada.com.sg

NARADA EUROPE (UK) LIMITED
Spectrum House, Dunstable Road, Redbourn,
St. Albans, Herts AL3 7PR
Tel: +44 (0)845 371 7095 Fax:+44 (0)845 612 2031
E-mail: sales@naradaeurope.com

