

OPzS

7OPzS490

OPzS Series

NARADA OPzS Series Lead Acid batteries are designed with a combination of die-casting Tubular positive framework and superfluous electrolyte technologies to offer a very high level of reliability and a long service life. OPzS batteries used special filter and proof design to ensure no acid fog runs over and burning proof, and also convenient examine and maintenance.

The specification of Narada OPzS series batteries make it idea for a wide range of applications such as Telecommunications, Photovoltaic System, Security System, emergency lighting and UPS.




Features & Benefits

- Low maintenance.
- Super long service life.
- Transparent containers, convenient to observe.
- Special filter installation for acid fog proof.
- High quality and high reliability.
- Special pole sealed technology.
- DIN40736-1 compliant.


Construction

- ComponentRaw material
- PositiveLead dioxide
- NegativeLead
- ContainerSAN
- CoverABS
- TerminalCopper
- SeparatorRubber-PVC
- ElectrolyteSulfuric acid




Terminal Dimensions

Cell Dimensions

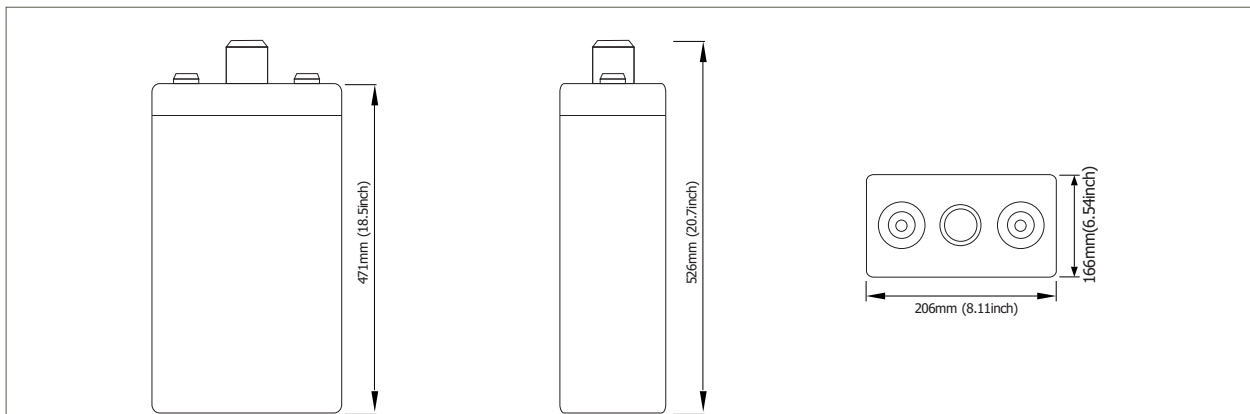

Battery Model	7OPzS490			
Designed Floating Life	20 Years			
Capacity(25°C)	24HR(22.4A,1.80V)	10HR(49.6A,1.80V)	5HR(83.2A,1.80V)	1HR(265A,1.75V)
	538AH	496AH	416AH	265AH
Dimensions	Length	Width	Height	Total Height
	166mm(6.54inch)	206mm(8.11inch)	471mm(18.5inch)	526mm(20.7inch)
Approx. Weight	without electrolyte:26.2Kg (57.8 lbs)		with electrolyte:38.0Kg(83.8 lbs)	
Internal Resistance	Full charged at 20°C: 0.00056 Ohm			
Self Discharge	3% of capacity declined per month at (20°C)			
Capacity Affected by Temp.(10HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage(25°C)	Cycle use		Float use	
	2.35-2.40V/cell(-5mV/cell/°C), max. Current: 125A		2.23V/cell(-3.0mV/cell/°C)	

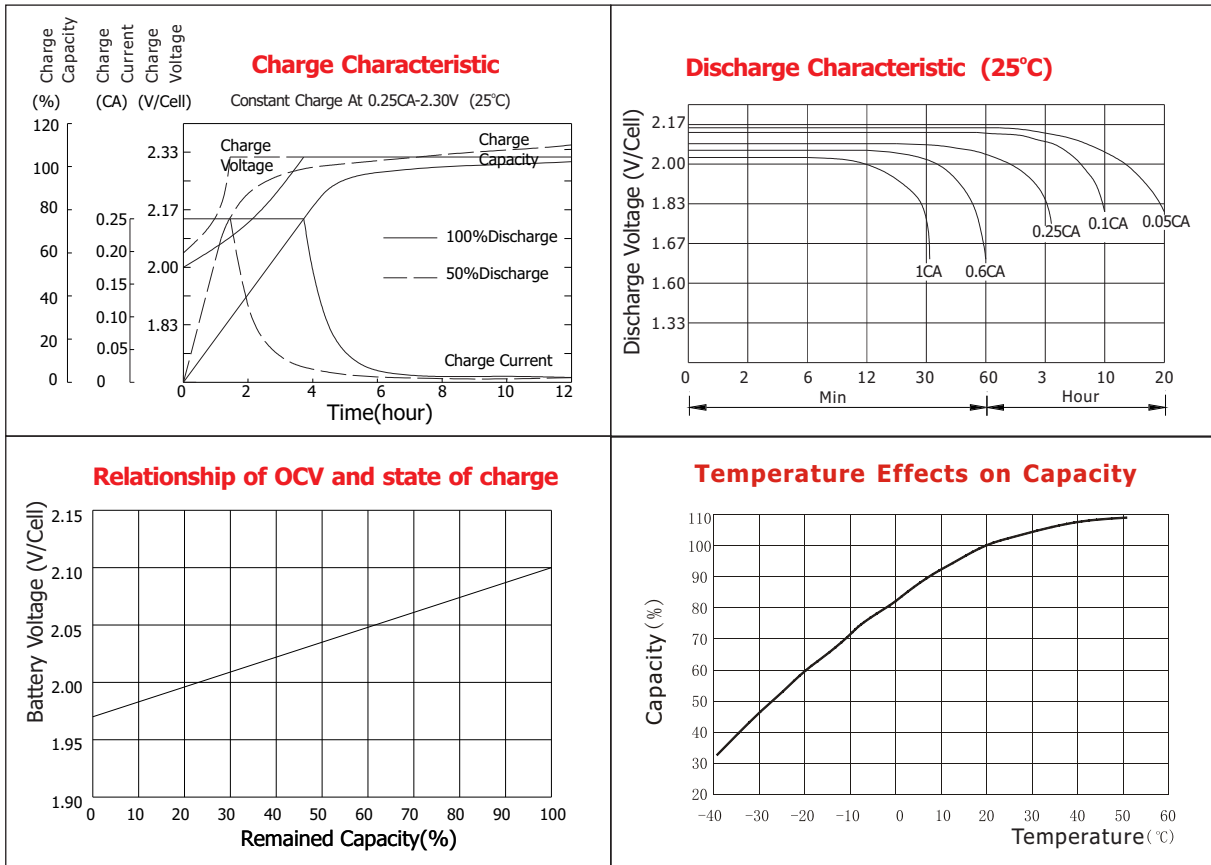

Constant Current Discharge Data Units: Amperes (25°C, 77°F)

End voltage	minutes	hours									
	30	1	2	3	4	5	6	8	10	24	48
1.60V	419.9	288.0	179.2	129.6	102.8	88.9	78.5	63.5	52.4	23.6	13.0
1.65V	406.2	281.2	175.4	127.7	101.8	87.8	77.7	63.1	52.1	23.6	12.9
1.70V	389.8	272.5	171.5	125.7	100.9	86.7	76.3	62.4	51.9	23.4	12.8
1.75V	375.2	264.7	167.6	122.8	98.9	85.2	74.9	61.2	51.2	22.9	12.7
1.80V	343.2	252.1	160.8	119.9	96.9	83.2	72.9	59.8	49.6	22.4	12.4
1.85V	289.0	234.6	152.0	115.9	94.0	80.6	70.5	58.2	48.9	21.6	11.8
1.95V	246.2	187.2	132.6	103.3	87.1	75.0	65.1	52.7	44.0	19.9	11.1

Constant Power Discharge Data Units: Watts per cell (25°C, 77°F)

End voltage	minutes	hours									
	30	1	2	3	4	5	6	8	10	12	24
1.60V	851.2	651.2	359.1	273.5	217.9	184.2	162.0	133.7	112.8	97.3	49.9
1.65V	805.7	605.8	357.1	271.5	217.0	183.0	160.9	132.8	112.0	96.7	49.5
1.70V	769.1	567.1	352.1	267.6	213.9	180.4	158.7	130.9	110.4	95.3	48.9
1.75V	738.4	534.5	342.2	260.7	204.9	174.0	155.1	128.9	108.5	94.1	48.2
1.80V	708.7	503.8	330.3	253.6	199.9	166.1	148.2	122.8	103.0	88.0	47.4
1.85V	680.9	469.1	317.3	241.7	190.9	161.6	142.4	119.4	98.7	84.6	46.1
1.95V	621.6	417.7	288.5	232.7	199.9	167.5	135.8	113.5	89.4	77.3	43.9

NARADA POWER SOURCE CO.,LTD.
No.459 Wensan Road, Hangzhou, Zhejiang, P.R.China
Tel:+86-571-28827013 Fax:+86-571-85126942
Website:www.naradabattery.com E-mail:intl@narada.biz

NARADA ASIA PACIFIC PTE.LTD.
65 Ubi Crescent #07-05 HOLA centre, Singapore
Tel: +65-6848 1191 Fax: +65-6749 3498
E-mail: sales@narada.com.sg

NARADA EUROPE (UK) LIMITED
Spectrum House, Dunstable Road, Redbourn,
St. Albans, Herts AL3 7PR
Tel: +44 (0)845 371 7095 Fax:+44 (0)845 612 2031
E-mail: sales@naradaeurope.com

