

# stored energy solutions for a demanding world




Model: **AG12V100F**

**AcmeG Series**

The AcmeG range front access gel batteries is designed based on the Acme series. Using the polymer gel electrolyte with real front access structure. The state of the art internal and external design ensures AcmeG the high reliability and makes the installations quite simple and safe when placed on a standard relay rack tray or in a closed cabinet. The design float life is 12 years at 20°C(68°F).



### Dimensions-mm [inch]

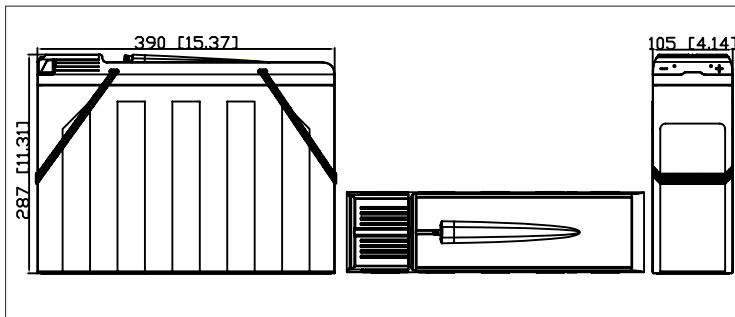

### Specifications

| Battery Model                              | AG12V100F   |
|--|---|
| Nominal Voltage                            | 12V   |
| Rated Capacity                             | 100Ah (10 hour rate) to 1.80V/cell @25°C(77°F)                      |
| Typical Weight                             | 33.0kg  |
| Internal Resistance                        | Approx 6.36mΩ   |
| Temperature Ranges                         | Operation (maximum): -40°C to 50°C(-40°F to 122°F)                  |
|  | Operation (recommended): 15°C to 25°C(59°F to 77°F)                 |
|  | Storage: -20°C to 40°C(-4°F to 104°F)                               |
| Float Voltage                              | 2.25V/cell@25°C(77°F)   |
| Recommended Maximum Charging Current Limit | 25A   |
| Equalize and Cycle Service                 | 2.35V~2.40V/cell@25°C(77°F)   |
| Self Discharge                             | The residual capacity is above 90% after 90 days storage(25°C/77°F) |
| Terminal                                   | M6 Female   |
| Terminal Hardware Torque                   | 8 ± 1.0Nm   |
| Container Material                         | ABS (V0 optional)   |

### Constant Current Discharge Characteristics Units: Amperes (25°C, 77°F)

| End voltage per cell | 5MIN  | 15MIN | 30MIN | 45MIN | 1HR  | 2HR  | 3HR  | 4HR  | 5HR  | 6HR  | 8HR  | 10HR | 12HR | 20HR | 24HR |
|----------------------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|------|
| 1.60V                | 359.6 | 193.2 | 117.5 | 85.0  | 68.7 | 39.4 | 28.6 | 22.4 | 19.0 | 16.3 | 12.5 | 10.3 | 8.71 | 5.46 | 4.55 |
| 1.67V                | 337.6 | 186.3 | 115.5 | 84.3  | 68.3 | 39.2 | 28.1 | 22.3 | 18.9 | 16.2 | 12.4 | 10.2 | 8.70 | 5.41 | 4.51 |
| 1.70V                | 334.7 | 183.3 | 113.5 | 83.7  | 67.8 | 38.9 | 27.9 | 22.2 | 18.6 | 16.0 | 12.4 | 10.2 | 8.61 | 5.40 | 4.51 |
| 1.75V                | 307.8 | 177.3 | 112.5 | 83.1  | 66.8 | 37.9 | 27.6 | 21.9 | 18.5 | 15.9 | 12.3 | 10.1 | 8.61 | 5.39 | 4.51 |
| 1.80V                | 275.9 | 165.3 | 107.6 | 79.7  | 65.1 | 37.6 | 27.4 | 21.8 | 18.1 | 15.6 | 12.2 | 10.0 | 8.54 | 5.33 | 4.50 |
| 1.83V                | 262.9 | 151.4 | 105.6 | 77.0  | 62.2 | 37.1 | 26.5 | 20.8 | 17.5 | 15.1 | 11.9 | 9.62 | 8.11 | 5.32 | 4.43 |
| 1.85V                | 246.0 | 147.4 | 98.2  | 74.0  | 60.3 | 35.7 | 25.8 | 20.6 | 17.1 | 14.7 | 11.5 | 9.54 | 8.02 | 5.22 | 4.39 |

### Discharge Data with Constant Power Units: Watts per cell (25°C, 77°F)

| End voltage per cell | 5MIN  | 15MIN | 30MIN | 45MIN | 1HR   | 2HR  | 3HR  | 4HR  | 5HR  | 6HR  | 8HR  | 10HR | 12HR | 20HR | 24HR |
|----------------------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| 1.60V                | 602.8 | 340.3 | 212.6 | 159.7 | 129.9 | 74.5 | 54.4 | 43.2 | 36.4 | 31.4 | 24.3 | 20.0 | 16.8 | 10.8 | 9.01 |
| 1.67V                | 579.8 | 334.3 | 210.6 | 158.7 | 128.9 | 74.3 | 53.7 | 43.1 | 36.4 | 31.2 | 24.2 | 19.8 | 16.8 | 10.7 | 9.01 |
| 1.70V                | 576.8 | 330.3 | 210.6 | 158.7 | 128.9 | 74.0 | 53.7 | 42.9 | 35.9 | 31.0 | 24.0 | 19.6 | 16.7 | 10.7 | 8.99 |
| 1.75V                | 537.9 | 328.3 | 209.6 | 157.7 | 126.9 | 73.6 | 53.1 | 42.9 | 35.9 | 30.9 | 23.8 | 19.6 | 16.6 | 10.7 | 8.99 |
| 1.80V                | 494.0 | 310.4 | 204.6 | 154.7 | 125.9 | 73.4 | 53.0 | 42.8 | 35.3 | 30.6 | 23.7 | 19.6 | 16.6 | 10.7 | 8.97 |
| 1.83V                | 472.1 | 284.4 | 202.6 | 149.7 | 120.9 | 72.5 | 51.7 | 41.2 | 34.5 | 29.7 | 23.5 | 19.1 | 16.1 | 10.7 | 8.91 |
| 1.85V                | 441.1 | 277.4 | 187.6 | 143.7 | 116.9 | 70.1 | 50.3 | 40.7 | 33.7 | 29.1 | 22.8 | 18.9 | 15.9 | 10.5 | 8.84 |


stored energy solutions for a demanding world

**NARADA**


Model: **AG12V100F**

**AcmeG Series**


Terminal Voltage(V) Vs. Discharge Time (25°C, 77°F)

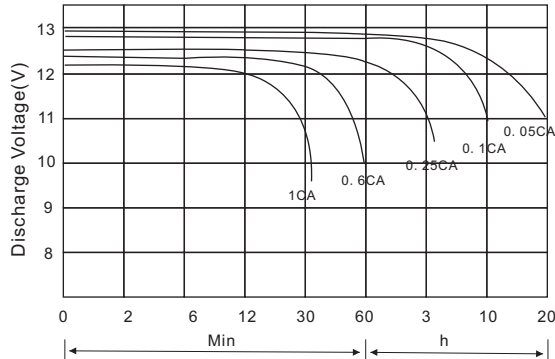


Battery Voltage Vs. Charge Time

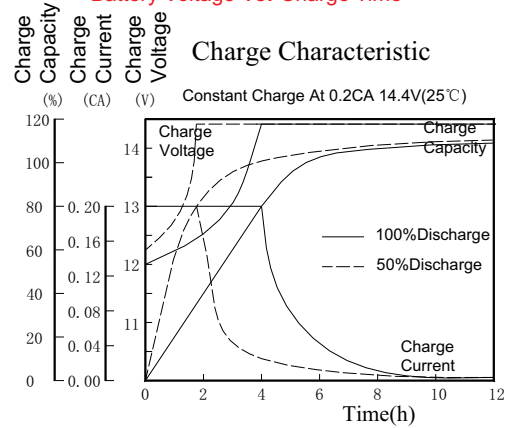

Relationship of OCV Vs. State of Charge

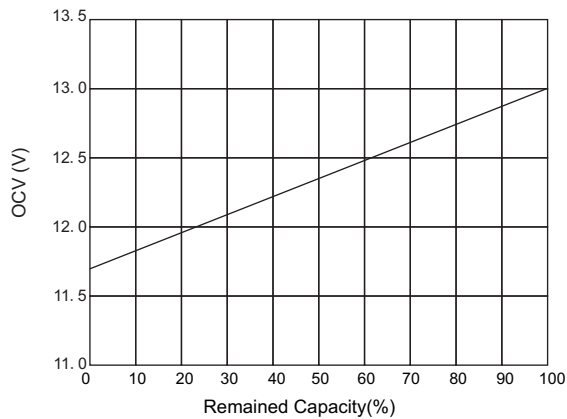

Capacity Retention Characteristic

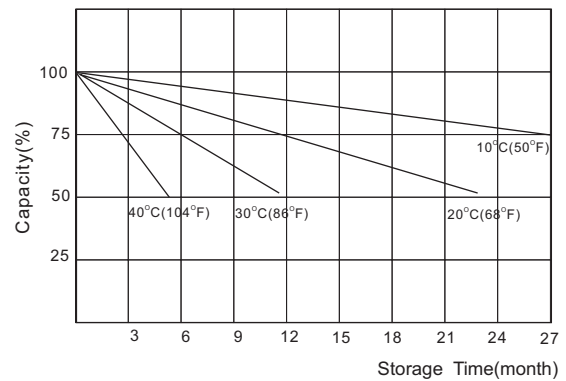

**Charging Procedures**

| Application | Charge Voltage (V/Cell) |           |                 | Max. Charge Current |
|-------------|-------------------------|-----------|-----------------|---------------------|
|             | Temperature             | Set Point | Allowable Range |                     |
| Cycle       | 25°C                    | 2.40      | 2.35~2.40       | 0.25C               |
| Standby     | 25°C                    | 2.25      | 2.23~2.27       |                     |

**Discharge Current VS. Discharge Voltage**

| Final Discharge Voltage V/Cell | 1.80       | 1.70              | 1.55              | 1.30       |
|--------------------------------|------------|-------------------|-------------------|------------|
| Discharge Current (A)          | 0.2C ≥ (A) | 0.2C < (A) < 0.5C | 0.5C < (A) < 1.0C | (A) > 1.0C |

**NARADA POWER SOURCE CO.,LTD.**

9F, Building A, No. 50 Zijinghua Road, Hangzhou, China  
 Tel:+86-571-28827013 Fax:+86-571-28828290  
 Website:www.naradabattery.com E-mail: intl@narada.biz

**NARADA ASIA PACIFIC PTE.LTD.**

65 Ubi Crescent #07-05 HOLA centre, Singapore  
 Tel: +65-6848 1191 Fax: +65-6749 3498  
 E-mail: sales@narada.com.sg

**NARADA EUROPE (UK) LIMITED**

Spectrum House, Dunstable Road, Redbourn,  
 St. Albans, Herts AL3 7PR  
 Tel: +44 (0)845 371 7095 Fax:+44 (0)845 612 2031  
 E-mail: sales@naradaeurope.com



**TEMPEL GROUP ARGENTINA**  
 www.tempelgroup.com  
 baires@tempelgroup.com  
 Tel.+54 11 4897-7184/7178

TEMPEL GROUP en el mundo

BUENO AIRES · MADRID · VALENCIA · BILBAO · SEVILLA · LISBOA · PORTO · LIMA · SÃO PAULO · SANTIAGO DE CHILE · BOGOTÁ · CIUDAD DE MÉXICO · CIUDAD DE PANAMÁ · MONTEVIDEO · QUITO



**tempel group**

AG12V100F-03-N-EN July 2012 Subject to revision without prior notice. E. & O. E.