

KBL12260W

12V 55Ah

Kaise®





The Kaise Long Life series, featuring VRLA AGM technology and a 12-year design life, has been developed for a wide range of applications such as UPS systems, telecommunications, electrical installations, and in general, any application requiring long service life and high reliability.

Specifications

Rated Voltage	12V	
Nominal Capacity (25°C)	55Ah	(C ₁₀ , 1.80V/cell)
Dimension	Length	229mm (9.02inches)
	Width	138mm (5.43inches)
	Container Height	205mm (8.07inches)
	Total Height	211mm (8.31inches)
Approx Weight	16.2Kg (35.7lbs)	
Terminal	T6(M6)	
Container Material	ABS (UL94 HB or V-0 optional)	
Short-circuit current	1265A	
Internal Resistance (25°C)	Approx 9 mΩ (Fully charged)	
Operating Temp. Range	Discharge : -20 ~ 55°C (-4 ~ 131°F)	
	Charge : -20 ~ 40°C (-4 ~ 104°F)	
	Storage : -15 ~ 50°C (5 ~ 122°F)	
Nominal Operating Temp. Range	25± 3°C (77± 5°F)	
Max. Charging Current (25°C)	0.25C	
Charge voltage (25°C) Temp. Coefficient	Float Charge	Equalization Charge
	2.25-2.30V/cell	2.35-2.40V/cell
	-3mV/cell/°C	-4mV/cell/°C
Effect of temp. to Capacity	40°C (104°F)	106%
	25°C (77°F)	100%
	0°C (32°F)	86%

Self Discharge ≤3% per month at 25°C (77°F).

Layout



Constant Current Discharge (Amperes) at 25°C (77°C)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h
1.85V/cell	114.5	85.4	71.2	59.8	46.0	34.3	29.0	21.7	17.4	13.1	10.5	8.74	6.16	5.15
1.80V/cell	133.4	100.8	82.8	68.9	52.0	38.4	32.1	23.8	18.9	14.2	11.3	9.41	6.60	5.50
1.75V/cell	145.6	108.0	87.5	72.3	54.3	39.9	33.3	24.6	19.5	14.6	11.6	9.63	6.72	5.59
1.70V/cell	157.7	115.2	92.5	76.1	56.7	41.4	34.5	25.4	20.1	15.0	11.8	9.84	6.84	5.67
1.67V/cell	164.7	119.5	95.4	78.3	58.1	42.4	35.2	25.9	20.5	15.2	12.0	10.0	6.91	5.72
1.60V/cell	181.5	129.3	102.3	83.3	61.4	44.6	36.9	27.0	21.3	15.8	12.4	10.3	7.07	5.84



Applications

- UPS
- Hospitals and Testing Laboratories
- Emergency Power Supply
- Industrial Process Control Facilities
- Banks and Financial Markets
- Data and Network Operation Centers

General Features

- 12 years design life (25°C)
- Excellent high current performance
- optimised for short discharge time
- Advanced AGM technology for superior high-rate power
- Long Life Alloy - minimizing grid growth, reducing gassing, and extending battery life
- Epoxy-sealed posts eliminate leaks
- Optimal energy density - saves floor space

Standards

- Compliance with IEC 60896 standards
- Classified as "Long Life" according to Eurobat
- CE, UL Approved
- Manufactured in Kaise IATF 16949, ISO 45001, ISO 9001 and ISO 14001 certified production facilities

KBL12260W


12V 55Ah




Constant Power Discharge (Watts/cell) at 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h
1.85V/cell	228.4	171.8	143.6	121.0	93.3	69.8	56.3	42.4	34.0	25.7	20.5	17.2	12.2	10.2
1.80V/cell	262.2	200.1	165.2	138.1	104.6	77.5	61.9	46.1	36.8	27.7	22.1	18.5	13.0	10.9
1.75V/cell	281.7	211.9	172.9	143.5	108.4	80.1	63.8	47.4	37.7	28.3	22.5	18.8	13.2	11.0
1.70V/cell	300.2	223.1	180.7	149.5	112.1	82.4	65.6	48.7	38.7	29.0	23.0	19.2	13.4	11.2
1.67V/cell	310.4	229.5	185.0	152.8	114.4	83.9	66.7	49.4	39.2	29.4	23.3	19.4	13.6	11.3
1.60V/cell	333.5	243.2	195.0	160.1	119.3	87.3	69.3	51.1	40.6	30.3	23.9	19.9	13.8	11.5


Discharge Characteristics

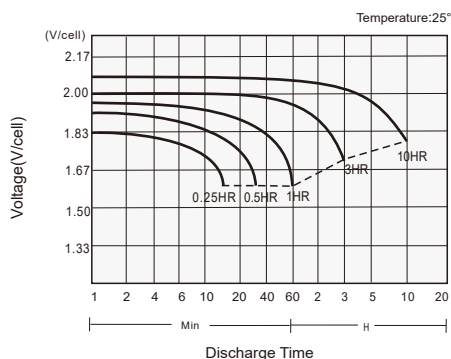


Charging Characteristics

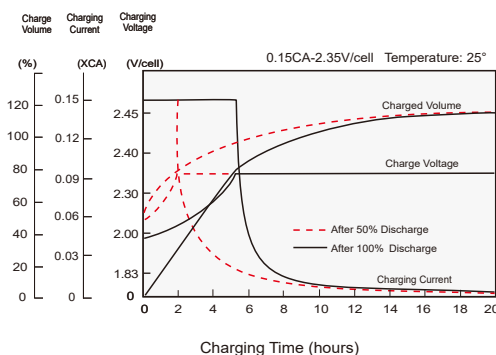

Effects of Temperature on Capacity

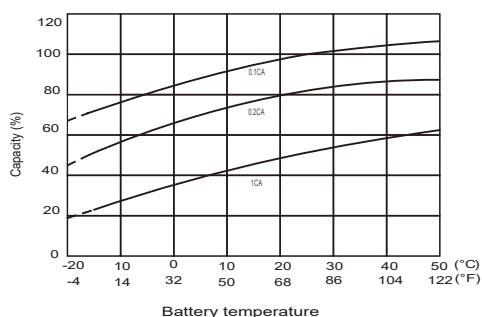

Self Discharge Characteristics

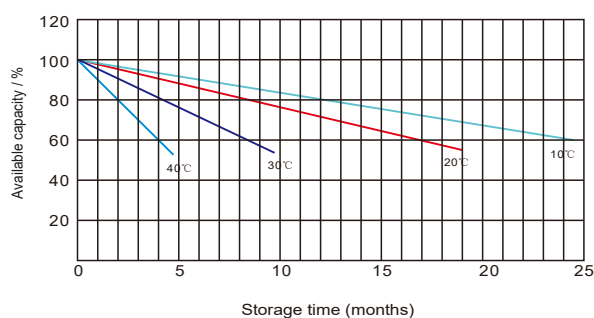

Contacto:
baires@tempelgroup.com
ar.tempelgroup@latam.com
Tel. +54 11 2734 8961

TEMPEL GROUP en el mundo
BARCELONA - BUENOS AIRES - MADRID - VALENCIA - BILBAO -
SEVILLA - LISBOA - PORTO - LIMA - SÃO PAULO - SANTIAGO DE CHILE -
BOGOTÁ - CIUDAD DE MÉXICO - CIUDAD DE PANAMÁ - MONTEVIDEO -
QUITO - HOUSTON - ROMA



tempel
group